


PARAFON Classic

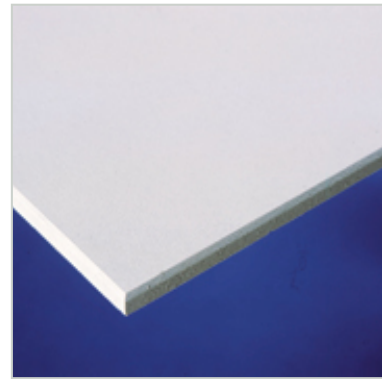

Certification Number	0809-CPR-1013 / Eurofins Expert Services Ltd, P.O. Box 1001, FI-02044 VTT, Finland
Short Description	PARAFON Classic is a removable acoustic tile of high quality with edge configuration A and E for installation in a grid system. With an surface made of coloured glass-fibre felt with low gloss and an aesthetically pleasing appearance, is it suitable for all types of indoor environments.
Application	Offices, commercial premises, schools, nurseries and stairways
Nominal Density	Edge A: 70-90 kg/m ³ Edge E: 140 kg/m ³
Usage Conditions	May be used continuously in 95 % relative humidity at a temperature of 30 °C, occasionally also at 100 % and 40 °C.

Dimensions

Dimensions		
Thickness	Width x Length	Weight
Edge A:		
15 mm	600 x 600 mm	1,1 kg/m ²
15 mm	600 x 1200 mm	1,1 kg/m ²
18 mm	600 x 600 mm	1,4 kg/m ²
18 mm	600 x 1200 mm	1,4 kg/m ²
18 mm	1200 x 1200 mm	1,4 kg/m ²
18 mm	600 x 1800 mm	1,4 kg/m ²
18 mm	625 x 625 mm	1,4 kg/m ²
18 mm	625 x 1250 mm	1,4 kg/m ²
25 mm	600 x 600 mm	1,8 kg/m ²
25 mm	600 x 2400 mm	1,8 kg/m ²
30 mm	600 x 600 mm	2,1 kg/m ²
30 mm	600 x 1200 mm	2,1 kg/m ²
40 mm	600 x 600 mm	2,8 kg/m ²
40 mm	600 x 1200 mm	2,8 kg/m ²

.		
Edge E24:		
15 mm	600 x 600 mm	1,5 kg/m ²
15 mm	600 x 1200 mm	1,5 kg/m ²
18 mm	1200 x 1200 mm	1,8 kg/m ²
18 mm	600 x 1800 mm (Edge A in short sides)	1,8 kg/m ²
18 mm	600 x 2400 mm (Edge A in short sides)	1,8 kg/m ²
40 mm	600 x 600 mm	4,0 kg/m ²

Manufacturing module = -8 mm

Packaging

Package Type Carton

Fire Properties

Reaction to Fire		
Property	Value	According to
Reaction to Fire, Euroclass	A1	EN 13964:2014 (EN 13501-1)

Other Fire Properties		
Property	Value	According to
Combustibility	Base product non-combustible	EN ISO 1182

Sound Properties

Acoustic Absorption Index		
Property	Value	According to
Sound Absorption a_w , Direct Fixing	Edge A:	EN 13964:2014 (EN ISO 354 / EN ISO 11654)
.	40 mm: 0,95	
.	.	
.	Parmitex Viva:	EN 13964:2014 (EN ISO 354 / EN ISO 11654)
.	30 mm: 0,65	
.	.	
Sound Absorption a_w , Construction Depth 200 mm	Edge A:	EN 13964:2014 (EN ISO 354 / EN ISO 11654)
.	15 mm: 0,90	
.	18 mm: 0,95	
.	25/40 mm: 1,00	EN 13964:2014 (EN ISO 354 / EN ISO 11654)
.	.	
.	.	
.	Parmitex Viva:	EN 13964:2014 (EN ISO 354 / EN ISO 11654)
.	30 mm: 1,00	
.	.	
.	Edge E:	EN 13964:2014 (EN ISO 354 / EN ISO 11654)
.	15 mm: 0,90	
.	18 mm: 0,95	
.	40 mm: 1,00	

Property	Value	According to
Practical Sound Absorption Class	Up to class A , for details see tab Acoustics.	EN 13964:2014 (EN ISO 354 / EN ISO 11654)

Mechanical Properties

Tensile/Flexural Strength		
Property	Value	According to
Flexural Tensile Strength	NPD	EN 13964:2014

Other Mechanical Properties		
Property	Value	According to
Shatter Properties	NPD	EN 13964:2014

Emissions

Property	Value	According to
Emission Indoor Climate	M1	Finnish Classification

Release of Dangerous Substances to the Indoor Environment		
Property	Value	According to
Release of Formaldehyde	E1	EN 13964:2014
Release of Asbestos	No content of asbestos	EN 13964:2014

Durability

Durability of Reaction to Fire Against Heat, Weathering, Ageing/Degradation. The fire performance of mineral wool does not deteriorate with time. The Euroclass classification of product is related to the organic content, which cannot increase with time.


Facings

Facing Material: White pre painted glass fiber surface layer. Backside thin glass fiber tissue.

Gloss Factor: Approx. 2

Light Reflectance: Approx. 83 %

Colours




White, NCS S 0500-N


Edges

Treatment of Edges: Edge A are thin spray painted, Edge E painted.

Edge Variations



A




E24

Installation

Installation with Armstrong Prelude suspension system.

Suspension Height

Installation with exposed suspension system



Tile thickness	Edge A	Edge E
15-18 mm	90 mm	90 mm
25 mm	110 mm	
40 mm	160 mm	170 mm

Minimum construction height using direct brackets is 52 mm.





Minimum suspension height for removal
Maintenance

Using a soft brush, by vacuum cleaning or by wiping with a damp cloth or sponge.

Disposal and Recycling

May be used as thermal insulation or taken to a dump. No restrictions.

Sound Absorption Curves



Head Office: PAROC GROUP, P.O. Box 240 (Energiakuja 3), FI-00181 Helsinki Finland, Tel. +358 46 876 8000, www.paroc.com

The information in this brochure describes the conditions and technical properties of the disclosed products, valid at the time of publication of this document and until replaced by the next printed or digital version. The latest version of this brochure is always available on the Paroc website. Our information material presents applications for which the functions and technical properties of our products have been approved. However, the information does not mean a commercial guarantee. We do not assume liability of the use of third party components used in the application or the installation of our products. We cannot warrant the suitability of our products if used in an area or conditions which are not provided in our information material. As a result of constant further development of our products we reserve the right to make alterations to our information material at any time. PAROC is a registered trademark of Paroc Group. This data sheet is valid in following countries: international use (general information).